



**TEST REPORT**  
**IEC 61347-2-11**  
**Part 2: Particular requirements:**  
**Section 11: Miscellaneous electronic circuits used with luminaires**

**Report Number**.....: 2213248.50  
**Date of issue** .....: 2017-03-01  
**Total number of pages**..... 42

**Name of Testing Laboratory preparing the Report**.....: DEKRA Certification B.V.  
 Meander 1051, 6825 MJ Arnhem, The Netherlands

**Applicant's name** .....: NormaGrup Technology S.A.  
**Address** .....: Parque Tecnologico de Asturias, Parcela 10, 33428 Llanera, Spain

**Test specification:**  
**Standard**.....: IEC 61347-2-11 (First Edition):2001 used in conjunction with IEC 61347-1:2015 (Third Edition)  
**Test procedure**.....: CB Scheme  
**Non-standard test method**.....: N/A

**Test Report Form No**.....: IEC61347\_2\_11E  
**Test Report Form(s) Originator**....: Intertek Semko AB  
**Master TRF** .....: 2015-10

**Copyright © 2015 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.**



This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

**This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

**General disclaimer:**  
 The test results presented in this report relate only to the object tested.  
 This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

<b>Test item description</b> .....:	DALI controller
<b>Trade Mark</b> .....:	NormalINK
<b>Manufacturer</b> .....	NormaGrup Technology S.A. Parque Tecnologico de Asturias, Parcela 10, 33428 Llanera, SPAIN
<b>Model/Type reference</b> .....:	IDNG64
<b>Ratings</b> .....:	230 Vac, 50/60 Hz, ta: 0 - 40 °C, DALI Imax.: 250 mA

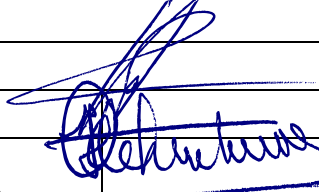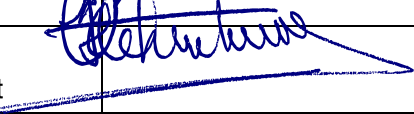Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):	
<input checked="" type="checkbox"/>	CB Testing Laboratory: DEKRA Certification B.V.
Testing location/ address.....: Meander 1051, 6825 MJ Arnhem, The Netherlands	
<input type="checkbox"/>	Associated CB Testing Laboratory:
Testing location/ address.....:	
Tested by (name, function, signature).....: L.N.H. Huynh 	
Approved by (name, function, signature) .....: H.J.H te Lindert 	
<input type="checkbox"/>	Testing procedure: CTF Stage 1:
Testing location/ address.....:	
Tested by (name, function, signature).....:	
Approved by (name, function, signature) .....:	
<input type="checkbox"/>	Testing procedure: CTF Stage 2:
Testing location/ address.....:	
Tested by (name + signature).....:	
Witnessed by (name, function, signature).....:	
Approved by (name, function, signature) .....:	
<input type="checkbox"/>	Testing procedure: CTF Stage 3:
<input type="checkbox"/>	Testing procedure: CTF Stage 4:
Testing location/ address.....:	
Tested by (name, function, signature).....:	
Witnessed by (name, function, signature).....:	
Approved by (name, function, signature) .....:	
Supervised by (name, function, signature).....:	

**List of Attachments (including a total number of pages in each attachment):**

APPENDIX 1: Pictures – 6 pages

APPENDIX 2: User manual – 2 pages

**Summary of testing:**
**Tests performed (name of test and test clause):**

 Full type testing according to IEC 61347-2-11:2001  
 in conjunction with IEC 61347-1:2015

**Testing location:**


 DEKRA Certification B.V.  
 Meander 1051  
 6825 MJ Arnhem  
 The Netherlands

**Summary of compliance with National Differences: P**
**List of countries addressed: EU Group Differences**
 **The product fulfils the requirements of:**

- EN 61347-2-11:2001 + C1:2002
- EN 61347-1:2015

*NOTE: There are no differences between the above mentioned EN standards compared to IEC standards.*

Copy of marking plate

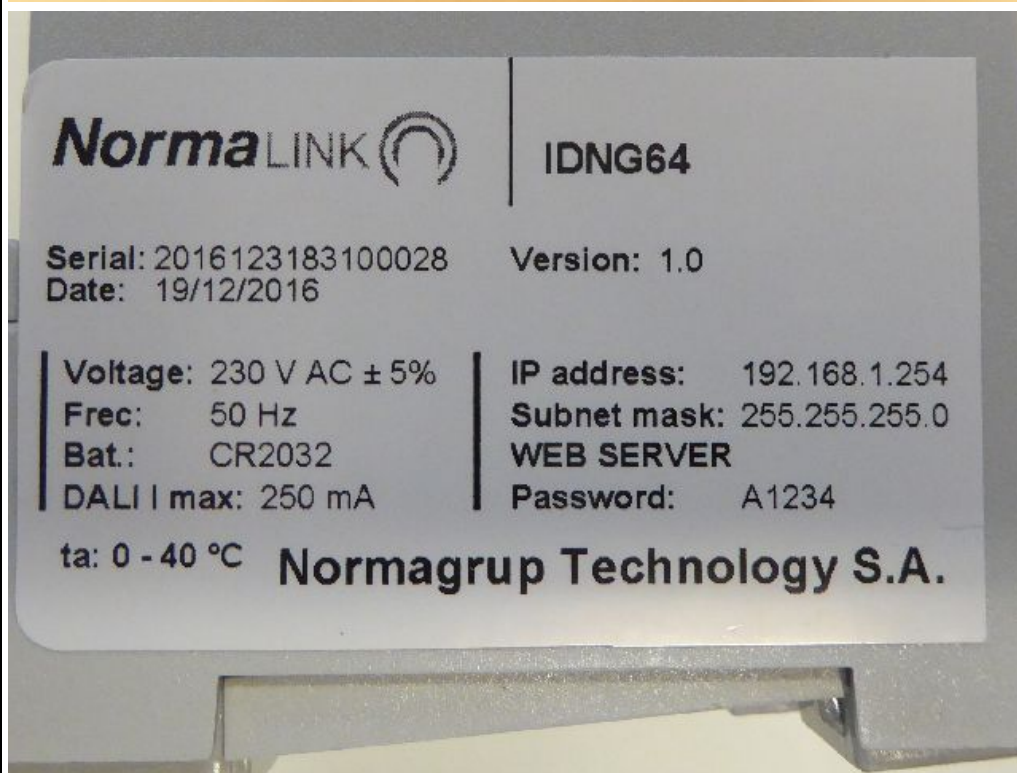

<b>Test item particulars</b> .....	
<b>Classification of installation and use</b> .....	Built-in in a cabinet
<b>Supply Connection</b> .....	With screw terminal
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object.....	N/A
- test object does meet the requirement .....	P (Pass)
- test object does not meet the requirement.....	F (Fail)
<b>Testing</b> .....	
<b>Date of receipt of test item</b> .....	2017-01-09
<b>Date (s) of performance of tests</b> .....	2017-01-16 to 2017-02-16
<b>General remarks:</b>	
<p>"(See Enclosure #)" refers to additional information appended to the report.          "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p> <p>Clause numbers between brackets refer to clauses in IEC 61347-1</p>	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 61347-1:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided .....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
<b>When differences exist; they shall be identified in the General product information section.</b>	
<b>Name and address of factory (ies)</b> .....	NormaGrup Technology S.A. Parque Tecnologico de Asturias, Parcela 10, 33428 Llanera, Spain
<b>General product information:</b>	
<p>The IDNG64 gateway enables to control self-contained emergency lighting units and conventional lights that are compatible with DALI standards.</p> <p>Control and monitoring of the devices connected to this gateway can be done from a tablet with the NORMALINK app.</p> <p>For more information refers to the user manual.</p>	

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

4 (4)	GENERAL REQUIREMENTS		P
- (4)	<u>Insulation materials</u> according requirements in Annex N of IEC 61347-1	(see Annex N)	N/A
- (4)	<u>Compliance of independent controlgear enclosure</u> with IEC 60 598-1		N/A
- (4)	<u>Built-in electronic controlgear</u> with double or reinforced insulation comply with Annex O of IEC 61347-1	(see Annex O)	N/A
- (4)	<u>SELV controlgear</u> comply with Annex L of IEC 61347-1	(see Annex L)	N/A

6 (6)	CLASSIFICATION			P
	Built-in controlgear .....	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	—
	Independent controlgear .....	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>	—
	Integral controlgear .....	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>	—

7 (7)	MARKING		P
<b>7.1 (7.1)</b>	<b>Mandatory markings</b>		<b>P</b>
	a) mark of origin	NormalINK	P
	b) model number or type reference	IDNG64	P
	d) correlation between interchangeable parts and controlgear marked		N/A
	e) rated supply voltage (V)	230 Vac	P
	supply frequency (Hz)	50/60 Hz	P
	supply current (A)		N/A
	f) earthing symbol		N/A
	Information if permitted to use without connection to earth		N/A
	k) wiring diagram		P
	l) value of tc alternative ta	ta: 0....40 °C	P
7.1 (-)	control terminals identified		P
	classification of insulation between live parts and control circuits		P

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

7.1 (7.2)	Marking durable and legible		P
	Rubbing 15 s water, 15 s petroleum; marking legible		P

<b>7.2 (7.1)</b>	<b>Information to be provided, if applicable</b>		<b>N/A</b>
	h) declaration of protection against accidental contact		N/A
	i) cross-section of conductors (mm <sup>2</sup> )		N/A
	j) number, type and wattage of lamp(s)		N/A
7.1 (7.2)	Marking durable and legible		N/A
	Rubbing 15 s water, 15 s petroleum; marking legible		N/A

<b>8 (10)</b>	<b>PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS</b>		<b>P</b>
- (10.1)	Controlgear protected against accidental contact with live parts		P
- (A2)	Voltage measured with 50 kΩ	(see Annex A)	N/A
- (A3)	Voltage > 35 V peak or > 60 V d.c. or protective impedance device	(see Annex A)	N/A
- (10.1)	Lacquer or enamel not used for protection or insulation		P
	Adequate mechanical strength on parts providing protection		P
- (10.2)	Capacitors > 0,5 μF: voltage after 1 min (V): < 50 V .....		P
<b>- (10.3)</b>	<b>Controlgear providing SELV</b>		<b>N/A</b>
	Accessible conductive parts are insulated from live parts by double or reinforced insulation in SELV controlgear		N/A
	No connection between output circuit and the body or protective earthing circuit		N/A
	No possibility of connection between output circuit and the body or protective earthing circuit through other conductive parts		N/A
	SELV outputs separated by at least basic insulation		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	ELV conductive parts insulated as live parts		N/A
	Tests according Annex L of IEC 61347-1		N/A

<b>- (10.4)</b>	<b>Accessible conductive parts in SELV circuits</b>		<b>N/A</b>
	Output voltage under load $\leq 25$ V r.m.s. or $\leq 60$ V d.c.		N/A
	If output voltage $> 25$ V r.m.s. or $> 60$ V d.c.; No load output $\leq 35$ V peak or $\leq 60$ V d.c and touch current does not exceed 0,7 mA (peak) or 2 mA d.c. ....:		N/A
	One conductive part is insulated if output voltage or current exceeding the values above and withstand test voltage 500 V		N/A
	Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor		N/A
	Y1 or Y2 capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.1 of IEC 60065		N/A

<b>9 (8)</b>	<b>TERMINALS</b>		<b>P</b>
	Screw terminals according section 14 of IEC 60598-1:		P
	Separately approved; component list	(see Annex 1)	P
	Part of the controlgear	(see Annex 2)	N/A
	Screwless terminals according section 15 of IEC 60598-1:		P
	Separately approved; component list	(see Annex 1)	P
	Part of the controlgear	(see Annex 3)	N/A

<b>10 (9)</b>	<b>PROVISION FOR PROTECTIVE EARTHING</b>		<b>N/A</b>
<b>- (9.1)</b>	<b>Provisions for protective earthing</b>		<b>N/A</b>
	Terminal complying with clause 8		N/A
	Locked against loosening and not possible to loosen by hand		N/A
	Not possible to loosen clamping means unintentionally on screwless terminals		N/A



IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	All parts of material minimizing the danger of electrolytic corrosion		N/A
	Made of brass or equivalent material		N/A
	Contact surface bare metal		N/A
	Test according 7.2.3 of IEC 60598-1		N/A
<b>- (9.2)</b>	<b>Provision for functional earthing</b>		<b>N/A</b>
	Comply with clause 8 and 9.1		N/A
	Functional earth insulated from live parts by double or reinforced insulation		N/A
<b>- (9.3)</b>	<b>Lamp controlgear with conductors for protective earthing by tracks on printed circuit board</b>		<b>N/A</b>
	Test with a current of 25 A between earthing terminal or earthing contact and each of the accessible metal parts; measured resistance ( $\Omega$ ) at $\geq 10$ A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$ .....		N/A
<b>- (9.4)</b>	<b>Earthing of built-in lamp controlgear</b>		<b>N/A</b>
	Earth by means of fixing to earthed metal of luminaire in compliance of 7.2 of IEC 60598-1		N/A
	Earthing terminal only for earthing the built-in controlgear		N/A
<b>- (9.5)</b>	<b>Earthing via independent controlgear</b>		<b>N/A</b>
- (9.5.1)	Earth connection to other equipment		N/A
	Looping or through connection, conductor min. 1,5 mm <sup>2</sup> and of copper or equivalent		N/A
	Protective earthing wires in line with 5.3.1.1 and clause 7 of IEC 60598-1		N/A
- (9.5.2)	Earthing of the lamp compartments powered via the independent lamp controlgear		N/A
	Test with a current of 25 A between input and output earth terminals; measured resistance ( $\Omega$ ) between earthing terminal or earthing contact and each of the accessible metal parts at $\geq 10$ A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$ .....		N/A
	Output earthing terminal marked as in 7.1 t) of IEC 61347-1		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

11 (11)	MOISTURE RESISTANCE AND INSULATION		P
	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance:		P
	For basic insulation $\geq 2 \text{ M}\Omega$ .....	Input – DALI	P
	For double or reinforced insulation $\geq 4 \text{ M}\Omega$ .....	Input/DALI – ALU foil	P
	Between primary and secondary circuits in controlgear providing SELV, values in Annex L in IEC 61347-1		N/A

12 (12)	ELECTRIC STRENGTH		P
	Immediately after clause 11 electric strength test for 1 min		P
	Basic insulation for SELV, test voltage 500 V		N/A
	Working voltage $\leq 50 \text{ V}$ , test voltage 500 V		N/A
	Working voltage $> 50 \text{ V} \leq 1000 \text{ V}$ , test voltage (V):		P
	Basic insulation, $2U + 1000 \text{ V}$	Input - DALI	P
	Supplementary insulation, $2U + 1000 \text{ V}$		N/A
	Double or reinforced insulation, $4U + 2000 \text{ V}$	Input/DALI – ALU foil	P
	No flashover or breakdown		P
	Solid or thin sheet insulation for double or reinforced insulation fulfil the requirements in Annex N in IEC 61347-1		N/A

14 (14)	FAULT CONDITIONS		P
- (14.1)	When operated under fault conditions the controlgear:		P
	- does not emit flames or molten material		P
	- does not produce flammable gases		P
	- protection against accidental contact not impaired		P
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	P

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
- (14.2)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (after any reduction in 14.2 - 14.5)	(see appended table)	N/A
- (14.3)	Short-circuit or interruption of semiconductor devices	(see appended table)	P
- (14.4)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	N/A
- (14.5)	Short-circuit across electrolytic capacitors	(see appended table)	P
- (14.6)	After the tests has been carried out on three samples:		P
	The insulation resistance $\geq 1 \text{ M}\Omega$ .....	> 10 M $\Omega$	P
	No flammable gases		P
	No accessible parts have become live		P
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		P
- (14.7)	Relevant fault condition tests with high-power a.c. supply		—

<b>15 (15)</b>	<b>CONSTRUCTION</b>		<b>P</b>
- (15.1)	<b>Wood, cotton, silk, paper and similar fibrous material</b>		<b>N/A</b>
	Wood, cotton, silk, paper and similar fibrous material not used as insulation		N/A
- (15.2)	<b>Printed circuits</b>		<b>P</b>
	Printed circuits used as internal connections complies with clause 14		P
- (15.3)	<b>Plugs and socket-outlets used in SELV or ELV circuits</b>		<b>N/A</b>
	No dangerous compatibility between output socket-outlet and a plug for socket-outlets for input circuit in relation to installation rules, voltages and frequencies		N/A
	Plugs and socket-outlets for SELV comply with IEC 60906-3 and IEC 60884-2-4		N/A
	Plugs and socket-outlets for SELV $\leq 3 \text{ A}$ , $\leq 25 \text{ V r.m.s.}$ or $\leq 60 \text{ V d.c.}$ and $\leq 72 \text{ W}$ comply with IEC 60906-3 and IEC 60884-2-4 or:		N/A
	- plugs not able to enter socket-outlets of other standardised system		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	- socket-outlets not admit plugs of other standardised system		N/A
	- socket-outlets without protective earth		N/A

<b>- (15.4)</b>	<b>Insulation between circuits and accessible parts</b>		<b>P</b>
- (15.4.2)	SELV circuits		N/A
	Source used to supply SELV circuits:		N/A
	- safety isolating transformer in accordance with relevant part 2 of IEC 61558		N/A
	- controlgear providing SELV in accordance with relevant part 2 of IEC 61347		N/A
	- another source		N/A
	Voltage in the circuit not higher than ELV		N/A
	SELV circuits insulated from LV by double or reinforced insulation		N/A
	SELV circuits insulated from non SELV circuits by double or reinforced insulation		N/A
	SELV circuits insulated from FELV circuits by supplementary insulation		N/A
	SELV circuits insulated from other SELV circuits by basic insulation		N/A
	SELV circuits insulated from accessible conductive parts according Table 6 in 15.4.5		N/A
- (15.4.3)	FELV circuits		P
	Source used to supply FELV circuits:		P
	- separating transformer in accordance with relevant part 2 of IEC 61558		N/A
	- separating controlgear providing basic insulation between input and output circuits in accordance with relevant part 2 of IEC 61347		N/A
	- another source		P
	- source in circuits separated by the LV supply by basic insulation		P
	Voltage in the circuit not higher than ELV		N/A
	FELV circuits insulated from LV supply by at least basic insulation		P

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	FELV circuits insulated from other FELV circuits if functional purpose		N/A
	FELV circuits insulated from accessible conductive parts according Table 6 in 15.4.5		P
	Plugs and socket-outlets for FELV system comply with:		N/A
	- plugs not able to enter socket-outlets of other voltage systems		N/A
	- socket-outlets not admit plugs of other voltage systems		N/A
	- socket-outlets have a protective conductor contact		N/A
- (15.4.4)	Other circuits		N/A
	Insulation between circuits other than SELV or FELV and accessible conductive parts in according Table 6 in 15.4.5.		N/A
- (15.4.5)	Insulation between circuits and accessible conductive parts		N/A
	Accessible conductive parts insulated from active parts of electric circuits by insulating according Table 6		N/A
	Requirements for Class II construction with equipotential bonding for protection against indirect contact with live parts:		N/A
	- all conductive parts are connected together		N/A
	- conductive parts are reliably connected together according test of IEC 60598-1 cl. 7.2.3		N/A
	- conductive parts comply with requirements of Annex A in case of insulation fault		P

16 (16)	CREEPAGE DISTANCES AND CLEARANCES		P
- (16)	Creepage distances and clearances according to 16.2 and 16.3		P
	Controlgears providing SELV comply with additional requirements in Annex L		N/A
	Insulating lining of metallic enclosures		N/A
	Controlgear protected against pollution comply with Annex P		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

<b>- (16.2)</b>	<b>Creepage distances</b>		<b>P</b>
- (16.2.2)	Minimum creepage distances for working voltages		P
	Creepage distances according to Table 7	(see appended table)	P
- (16.2.3)	Creepage distances for working voltages with frequencies above 30 kHz		N/A
	Creepage distances according to Table 8	(see appended table)	N/A

<b>- (16.3)</b>	<b>Clearances</b>		<b>P</b>
- (16.3.2)	Clearances for working voltages		P
	Clearances distances according to Table 9	(see appended table)	P
- (16.3.3)	Clearances for ignition voltages and working voltages with higher frequencies		N/A
	Clearances distances for basic or supplementary insulation according to Table 10	(see appended table)	N/A
	Clearances distances for reinforced insulation according to Table 11	(see appended table)	N/A

<b>17 (17)</b>	<b>SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS</b>		<b>P</b>
	Screws, current-carrying parts and connections in compliance with IEC 60598-1 (clause numbers between parentheses refer to IEC 60598-1)		P
<b>(4.11)</b>	<b>Electrical connections</b>		<b>P</b>
(4.11.1)	Contact pressure		P
(4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
(4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
(4.11.4)	Material of current-carrying parts		P
(4.11.5)	No contact to wood or mounting surface		P
(4.11.6)	Electro-mechanical contact systems		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

<b>(4.12)</b>	<b>Mechanical connections and glands</b>		<b>N/A</b>
(4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part ..... :		N/A
	Torque test: torque (Nm); part ..... :		N/A
	Torque test: torque (Nm); part ..... :		N/A
(4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
(4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm)..... :		N/A
	- lampholder; torque (Nm)..... :		N/A
	- push-button switches; torque 0,8 Nm..... :		N/A
(4.12.5)	Screwed glands; force (Nm) ..... :		N/A

<b>18 (18)</b>	<b>RESISTANCE TO HEAT, FIRE AND TRACKING</b>		<b>P</b>
- (18.1)	Ball-pressure test:		N/A
	- part tested; temperature (°C)..... :		N/A
	- part tested; temperature (°C)..... :		N/A
- (18.2)	Test of printed boards:		P
	- part tested..... :		N/A
	- part tested..... :		N/A
- (18.3)	Glow-wire test (650 °C):		P
	- part tested..... : Plastic enclosure		P
	- part tested..... :		N/A
- (18.4)	Needle flame test (10 s):		N/A
	- part tested..... :		N/A
	- part tested..... :		N/A
- (18.5)	Tracking test:		N/A
	- part tested..... :		N/A
	- part tested..... :		N/A

IEC 61347-2-11			
Clause	Requirement + Test		Verdict
<b>19 (19)</b>	<b>RESISTANCE TO CORROSION</b>		<b>N/A</b>
	- test according 4.18.1 of IEC 60598-1		N/A
	- adequate varnish on the outer surface		N/A
<b>20 (-)</b>	<b>ANNEXES</b>		<b>P</b>
	Comply with appropriate annexes of IEC 61347-1	(see Annexes)	P
<b>14</b>	<b>TABLE: tests of fault conditions</b>		<b>P</b>
Part	Simulated fault		Hazard
C4	Short-circuited	No communication. No unsafe situation occurred.	NO
Q2 (D-S)	Short-circuited	No communication. No unsafe situation occurred.	NO
Q4 (D-S)	Short-circuited	No communication. No unsafe situation occurred.	NO



IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

<b>16 (16)</b>	<b>TABLES: Creepage distances and clearances (mm)</b>	<b>P</b>
----------------	---	----------

<b>Table 7</b>	<b>Minimum creepage distances for working voltages</b>						<b>P</b>
RMS working voltage (V) not exceeding	50	150	250	500	750	1000	
Required basic or supplementary insulation, PTI ≥ 600	0,6	0,8	1,3	2,5	3,8	5,0	
Measured							
Supplementary information							
Required basic or supplementary insulation, PTI < 600	1,2	1,6	2,5	5	7,6	10	
Measured							
Supplementary information							
Required reinforced insulation, PTI ≥ 600	-	1,6	2,6	5	7,6	10	
Measured							
Supplementary information							
Required reinforced insulation, PTI < 600	-	3,2	5	10	16	20	
Measured			>10 mm				
Supplementary information							

<b>Table 8</b>	<b>Minimum creepage distances for sinusoidal or non-sinusoidal working voltages at different frequency range; basic or supplementary insulation</b>	<b>N/A</b>
Peak value of the working voltage $\hat{U}_{out}$ kV .....		—
Frequency .....		—
Required distance .....		—
Measured .....		
Supplementary information		—

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

Table 9	Minimum clearances distances for working voltages						P
RMS working voltage (V) not exceeding	50	150	250	500	750	1000	
Clearances with mains supply transients according impulse withstand category II							
- Required basic or supplementary insulation	0,2	0,5	1,5	3	5,5	5,5	
- Measured			>10 mm				
Supplementary information							
- Required reinforced insulation	0,4	1,6	3	5,5	8	8	
- Measured							
Supplementary information							
Clearances without mains supply transients							
- Required basic or supplementary insulation	0,2	0,2	0,2	0,2	0,3	0,7	
- Measured							
Supplementary information							
- Required reinforced insulation	0,2	0,2	0,2	0,4	1,0	1,6	
- Measured							
Supplementary information							

Table 10	Minimum distances of clearances for sinusoidal or non-sinusoidal voltages; inhomogeneous field conditions; basic or supplementary insulation	N/A
Voltage $\hat{U}_{out}$ kV .....		—
Frequency.....		—
Transients or ignition pulse voltage		
Required distance .....		—
Measured.....		
Supplementary information		—
Ignition voltage or working voltage		
Required distance .....		—
Measured.....		
Supplementary information		—

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
<b>Table 11</b>	<b>Minimum distances of clearances for sinusoidal or non-sinusoidal voltages; inhomogeneous field conditions; reinforced insulation</b>		<b>N/A</b>
Voltage $\hat{U}_{out}$ kV .....	:		—
Frequency.....	:		—
Transients or ignition pulse voltage			
Required clearance .....	:		—
Measured.....	:		
Supplementary information			—
Ignition voltage or working voltage			
Required clearance .....	:		—
Measured.....	:		
Supplementary information			—

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

<b>(A)</b>	<b>ANNEX A - TEST TO ESTABLISH WHETHER A CONDUCTIVE PART IS A LIVE PART WHICH MAY CAUSE AN ELECTRIC SHOCK</b>		<b>N/A</b>
(A.1)	Comply with A.2 or A.3		N/A
(A.2)	Voltage $\leq 35$ V peak or $\leq 60$ V d.c .....		N/A
(A.3)	If voltage measured according Clause A.2 exceeds the limit value; touch current does not exceed 0,7 mA (peak) or 2 mA d.c. ....		N/A
	Comply with Annex G.2 of IEC 60598-1		N/A

<b>(C)</b>	<b>ANNEX C – PARTICULAR REQUIREMENTS FOR ELECTRONIC LAMP CONTROLGEAR WITH MEANS OF PROTECTION AGAINST OVERHEATING</b>		<b>N/A</b>
<b>(C3)</b>	<b>GENERAL REQUIREMENTS</b>		<b>N/A</b>
(C3.1)	Thermal protection means integral with the convertor, protected against mechanical damage		N/A
	Renewable only by means of a tool		N/A
	If function depending on polarity, for cord-connected equipment protection means in both leads		N/A
	Thermal links comply with IEC 60691		N/A
	Electrical controls comply with IEC 60730-2-3		N/A
(C3.2)	No risk of fire by breaking (clause C7)		N/A
<b>(C5)</b>	<b>CLASSIFICATION</b>		<b>N/A</b>
	a) automatic resetting type		—
	b) manual resetting type		—
	c) non-renewable, non-resetting type		—
	d) renewable, non-resetting type		—
	e) other type of thermal protection; description ....		—
<b>(C6)</b>	<b>MARKING</b>		<b>N/A</b>
(C6.1)	Symbol for temperature declared thermally protected ballasts		N/A
(C6.2)	Declaration of the type of protection provided		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

<b>(C7)</b>	<b>LIMITATION OF HEATING</b>		<b>N/A</b>
<b>(C7.1)</b>	<b>Preselection test:</b>		<b>N/A</b>
	Test sample placed for at least 12 h in an oven having temperature ( $t_c - 5$ ) K		N/A
	No operation of the protection device		N/A
<b>(C7.2)</b>	<b>Functioning of protection means:</b>		<b>N/A</b>
	Normal operation of the sample in a test enclosure according to Annex D at an ambient temperature such that ( $t_c +0; -5$ ) °C is obtained		N/A
	No operation of the protection device		N/A
	Introducing of the most onerous test condition determined during test of clause 14.2 to 14.5		N/A
	Output of windings connected to the mains supply short-circuited, and other part of the controlgear operated under normal conditions		N/A
	Increasing of the current through the windings continuously until operation of the protection means		N/A
	Continuous measuring of the highest surface temperature		N/A
	Ballasts according to C5 a) or C5 e) operated until stable conditions are achieved		N/A
	Automatic-resetting thermal protectors working 3 times		N/A
	Ballasts according to C5 b) working 6 times		N/A
	Ballasts according to C5 c) and C5) d) working once		N/A
	Highest temperature does not exceed the marked value		N/A
	Any overshoot of 10% over the marked value within 15 min		N/A
	After 15 min value not exceed marked value		N/A

<b>(D)</b>	<b>ANNEX D – REQUIREMENTS FOR CARRY OUT THE HEATING TESTS OF THERMALLY PROTECTED LAMP CONTROLGEAR</b>		<b>N/A</b>
	Tests in C7 performed in accordance with Annex D, if applicable		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

<b>(F)</b>	<b>ANNEX F - DRAUGHT-PROOF ENCLOSURE</b>		<b>N/A</b>
	Draught-proof enclosure in accordance with the description		N/A
	Dimensions of the enclosure		N/A
	Other design; description		N/A

<b>(H)</b>	<b>ANNEX H - TESTS</b>		<b>P</b>
	All tests performed in accordance with the advice given in Annex H, if applicable		P

<b>(L)</b>	<b>ANNEX L: PARTICULAR ADDITIONAL REQUIREMENTS FOR CONTROLGEARS PROVIDING SELV</b>		<b>N/A</b>
<b>(L.3)</b>	<b>Classification</b>		<b>N/A</b>
	Class I	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	Class II	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	Class III	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	non-inherently short circuit proof controlgear	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	inherently short circuit proof controlgear	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	fail safe controlgear	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	non-short-circuit proof controlgear	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
<b>(L.4)</b>	<b>Marking</b>		<b>N/A</b>
	Adequate symbols are used		N/A
<b>(L.5)</b>	<b>Protection against electric shock</b>		<b>N/A</b>
	Comply with clause 9.2 of IEC 61558-1		N/A
<b>(L.6)</b>	<b>Heating</b>		<b>N/A</b>
	No excessive temperatures in normal use		N/A
	Value if capacitor $t_c$ marked .....		—
	Winding insulation classified as Class .....		—
	Comply with tests of clause 14 of IEC 61558-1 with adjustments		N/A
<b>(L.7)</b>	<b>Short-circuit and overload protection</b>		<b>N/A</b>
	Comply with tests of clause 15 of IEC 61558-1 with adjustments		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

<b>(L.8)</b>	<b>Insulation resistance and electric strength</b>		<b>N/A</b>
(L.8.1)	Conditioned 48 h between 91 % and 95 %		N/A
(L.8.2)	Insulation resistance		N/A
	Between input- and output circuits not less than 5 MΩ .....		N/A
	Between metal parts of class II convertors which are separated from live parts by basic insulation only and the body not less than 5 MΩ .....		N/A
	Between metal foil in contact with the inner and outer surfaces of enclosures of insulating material not less than 2 MΩ .....		N/A
(L.8.3)	Electric strength		N/A
	1) Between live parts of input circuits and live parts of output circuits .....		N/A
	2) Over basic or supplementary insulation between:		N/A
	a) live parts having different polarity .....		N/A
	b) live parts and body if intended to be connected to protective earth .....		N/A
	c) accessible metal parts and a metal rod of the same diameter as the flexible cable or cord .....		N/A
	d) live parts and an intermediate metal part .....		N/A
	e) intermediate metal parts and the body .....		N/A
	f) each input circuit and all other input circuits .....		N/A
	3) Over reinforced insulation between the body and live parts .....		N/A
<b>(L.9)</b>	<b>Construction</b>		<b>N/A</b>
(L.9.1)	Transformer comply with 19.12 of IEC 61558-1 and 19 of IEC 61558-2-6		N/A
	HF transformer comply with 19 of IEC 61558-2-16		N/A
<b>(L.10)</b>	<b>Components</b>		<b>N/A</b>
	Protective devices comply with 20.6 – 20.11 of IEC 61558-1		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

<b>(L.11)</b>	<b>Creepage distances, clearances and distances through insulation</b>		<b>N/A</b>
	Creepage distances and clearances not less than in Clause 16		N/A
	Distance through insulation according Table L.5 in IEC 61347-1		N/A
	1) Basic distance through insulation		N/A
	Required distance (mm) .....		—
	Measured (mm) .....		N/A
	Supplementary information		—
	2) Supplementary distance through insulation		N/A
	Required distance (mm) .....		—
	Measured (mm) .....		N/A
	Supplementary information		—
	3) Reinforced distance through insulation		N/A
	Required distance (mm) .....		—
	Measured (mm) .....		N/A
	Supplementary information		—

<b>(N)</b>	<b>ANNEX N: REQUIREMENTS FOR INSULATION MATERIALS USED FOR DOUBLE OR REINFORCED INSULATION</b>		<b>N/A</b>
<b>(N.4)</b>	<b>General requirements</b>		<b>N/A</b>
(N.4.1)	Material comply with IEC 60085 and IEC 60216 series		N/A
<b>(N.4.2)</b>	<b>Solid insulation</b>		<b>N/A</b>
	Electric strength test at least 5 kV or 1,35 x test voltage in Table N.1		N/A
	If not classified according IEC 60085 and IEC 60216 series: Electric strength test increased 10 % of 5,5 kV or 1,5 x test voltage in Table N.1		N/A
<b>(N.4.3)</b>	<b>Thin sheet insulation</b>		<b>N/A</b>
(N.4.3.1)	Thickness and composition of thin sheet insulation		N/A
	- Inside the ballast and not subjected to handling or abrasion during the production and during maintenance		N/A



IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	- Non-separated layers: Min. 3 layers and fulfil mandrel test of 150N		N/A
	- Separated layers: Min. 2 layers and each layer fulfil mandrel test of 50N		N/A
	- Separated layers (alternative): Min. 3 layers and 2/3 of the layers fulfil mandrel test of 100N		N/A
(N.4.3.2)	Mandrel test (electric strength test during mechanical stress)		N/A
	Electric strength test after mandrel test:		N/A
	- Non-separated layers: min. 5 kV or 1,35 x test voltage in Table N.1		N/A
	- 2/3 of min. 3 separated layers: min. 5 kV or 1,25 x test voltage in Table N.1		N/A
	- one of 2 separated layers: min. 5 kV or 1,25 x test voltage in Table N.1		N/A
	No flashover or breakdown occurred		N/A

<b>(O)</b>	<b>ANNEX O: ADDITIONAL REQUIREMENTS FOR BUILT-IN ELECTRONIC CONTROLGEAR WITH DOUBLE OR REINFORCED INSULATION</b>		<b>N/A</b>
<b>(O.6)</b>	<b>Marking</b>		<b>N/A</b>
	Marking according clause 7 (7)	See clause 7	N/A
	Special symbol		N/A
	Meaning of the special symbol explained in catalogue		N/A
<b>(O.7)</b>	<b>Protection against accidental contact with live parts</b>		<b>N/A</b>
	Requirements of clause 8 (10)	See clause 8	N/A
	Test finger not possible to make contact with basic insulated metal parts		N/A
<b>(O.8)</b>	<b>Terminals</b>		<b>N/A</b>
	Clause 9 (8)	See clause 9	N/A
<b>(O.9)</b>	<b>Provision for earthing</b>		<b>N/A</b>
	Functional earthing terminals comply with clause 9 of part 1		N/A
	No protective earthing terminal		N/A
<b>(O.10)</b>	<b>Moisture resistance and insulation</b>		<b>N/A</b>
	Clause 11 (11)	See clause 11	N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
<b>(O.11)</b>	<b>Electric strength</b>		N/A
	Clause 12 (12)	See clause 12	N/A
<b>(O.13)</b>	<b>Fault conditions</b>		<b>N/A</b>
	Clause 14 (14)	See clause 14	N/A
	End of test, between live part and accessible metal parts or external parts of insulating material in contact with the supporting surface comply with dielectric strength test reduced to 35 % of values according Table 1 in part 1		N/A
	Insulation resistance according to O.10 between live part and accessible metal parts or external parts of insulating material in contact with the supporting surface not less than 4 MΩ		N/A
<b>(O.14)</b>	<b>Construction</b>		<b>N/A</b>
	Clause 17 (15)	See clause 17	N/A
	Accessible metal parts insulated from live parts by double or reinforced insulation		N/A
	Live part insulated from supporting surface in contact with external faces by double or reinforced insulation		N/A
<b>(O.15)</b>	<b>Creepage distances and clearances</b>		<b>N/A</b>
	Clause 18 (16)	See clause 18	N/A
	Comply with corresponding values for luminaries in IEC 60598-1		N/A
<b>(O.16)</b>	<b>Screws, current-carrying parts and connections</b>		<b>N/A</b>
	Clause 19 (17)	See clause 19	N/A
<b>(O.17)</b>	<b>Resistance to heat and fire</b>		<b>N/A</b>
	Clause 20 (18)	See clause 20	N/A
<b>(O.18)</b>	<b>Resistance to corrosion</b>		<b>N/A</b>
	Clause 21 (19)	See clause 21	N/A
<b>(P)</b>	<b>Creepage distances and clearances and distance through isolation (DTI) for lamp controlgear which are protected against pollution by the use of coating or potting</b>		<b>N/A</b>

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

<b>(P.1)</b>	<b>General</b>		<b>N/A</b>
	P.2 applies if creepage distances less than the minimum in Table 7 and 8		N/A
	P.3 applies if clearance less than the minimum in Table 9, 10 and 11		N/A
<b>(P.2)</b>	<b>Creepage distances</b>		<b>N/A</b>
(P.2.2)	Minimum creepage distances for working voltages and rated voltages with frequencies up to 30 kHz (Table P.1)		N/A
	Basic or supplementary insulation:		N/A
	Required creepage .....		—
	Measured .....		N/A
	Supplementary information		—
	Reinforced insulation:		N/A
	Required creepage .....		—
	Measured .....		N/A
	Supplementary information		—
(P.2.3)	Creepage distances for working voltages with frequencies above 30 kHz (Table P.2)		N/A
	Voltage $\hat{U}_{out}$ kV .....		—
	Frequency .....		—
	Required distance .....		—
	Measured .....		N/A
	Supplementary information		—
(P.2.4)	Compliance with the required creepage distances		N/A
(P.2.4.1)	Compliance in accordance with 16.3.3 and test according P.2.4.2		N/A
(P.2.4.3)	Electrical tests after conditioning		N/A
(P.2.4.3.1)	Insulation resistance and electric strength according Clause 11 and 12		N/A
<b>(P.3)</b>	<b>Distance through isolation</b>		<b>N/A</b>
(P.3.4)	Electrical tests after conditioning		N/A
(P.3.4.1)	Insulation resistance and electric strength according Clause 11 and 12		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
(P.3.4.2)	Impulse voltage dielectrical test		N/A
	Basic or supplementary insulation:		N/A
	Working/rated voltage .....		—
	Impulse voltage .....		N/A
	Supplementary information		—
	Reinforced insulation:		N/A
	Working/rated voltage .....		—
	Impulse voltage .....		N/A
	Supplementary information		—

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 1 TABLE: Critical components information							P
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>	
<b>Description:</b>							
PCB board	B	Normagrup	IDNG_64BASE_v2 (P3418)		IEC 61347-2-11	*	
	B	Normagrup	IDNG64_VIS_v2 (P3420)		IEC 61347-2-11	*	
PCB material	A	Aismalibar	IGAV FR95	Glass epoxy. Rigid laminates - PTH applications, supports standard double side lead free assembly processes	IEC 61347-2-11	*	
<b>Description:</b>							
Transformer (ML1)	B	Vigortronix	VTX-214-005-118	100-240Vac 50/60 Hz 18Vdc, 0,28A		UL/*	
<b>Description:</b>							
X-cap (C1)	B	Iskra	KNB1560 U22	0,22uF; 275Vac X2		VDE	
<b>Description:</b>							
Fuse (F1)	B	Vishay	PTCCL05H950HT E	PTC 56 Ohm		UL/*	
<b>Description:</b>							
Varistor (VR1)	B	Joyin	JVR07N361K65PA Y	Varistor 230V/0,25W		VDE	
<b>Description:</b>							
Opto-coupler (IC5, IC6)	B	Avago	HCPL-181-00BE	Optocoupler SMD Mini-Flat Type		VDE	

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

Description:						
Screw terminal (X1)	B	Stelvio	CLL7,62/2	TERMINAL BLOCK 2V 7,62MM		UL/*
Screw terminal (X2)	B	Degson	DG500-5,08-02P-14-	TERMINAL BLOCK 300V 5MM		VDE
Screwless terminal (X8)	B	AUK	PA07D-H	BOARD CONNECTOR		*
Screwless terminal (X3)	B	Neltron	2317SEH-06	2.5mm Wire to Board Connectors		UL/*
Wire	A	Normagrup	6 wires poles (P2415)	6 wires poles		*
Description:						
Battery	A	Panasonic	CR 2032	Battery Lithium 3V COIN 20mm		*
<p>Supplementary information:</p> <p><sup>1)</sup> Provided evidence ensures the agreed level of compliance. See OD-CB2039.</p> <p>The codes above have the following meaning:</p> <p>A - The component is replaceable with another one, also certified, with equivalent characteristics</p> <p>B - The component is replaceable if authorised by the test house</p> <p>C - Integrated component tested together with the appliance</p> <p>D - Alternative component</p>						

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	Screw terminals (part of the luminaire)		N/A
<b>(14)</b>	<b>SCREW TERMINALS</b>		<b>N/A</b>
(14.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm <sup>2</sup> )..... :		—
(14.3.3)	Conductor space (mm)..... :		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread) ..... :	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm)..... :		N/A
	Torque (Nm)..... :		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N)..... :		N/A
(14.4.8)	Without undue damage		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 3	Screwless terminals (part of the luminaire)		N/A
<b>(15)</b>	<b>SCREWLESS TERMINALS</b>		<b>N/A</b>
(15.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5)	Terminals and connections for internal wiring		N/A
(15.5.1)	Mechanical tests		N/A
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples)..... :		N/A
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples)..... :		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples)..... :		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)..... :		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)..... :		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples)..... :		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples)..... :		N/A




IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A
15.6.2	Mechanical tests		N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N) .....		N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N) .....		N/A
(15.6.3)	Electrical tests		N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict



<b>(15.6.3.1)</b> <b>(15.6.3.2)</b>	<b>TABLE: Contact resistance test / Heating tests</b>										<b>N/A</b>
	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop of two inseparable joints										
	Voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV).....:										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV).....:										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV).....:										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV).....:										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
Supplementary information:											


**APPENDIX 2 – Pictures:**


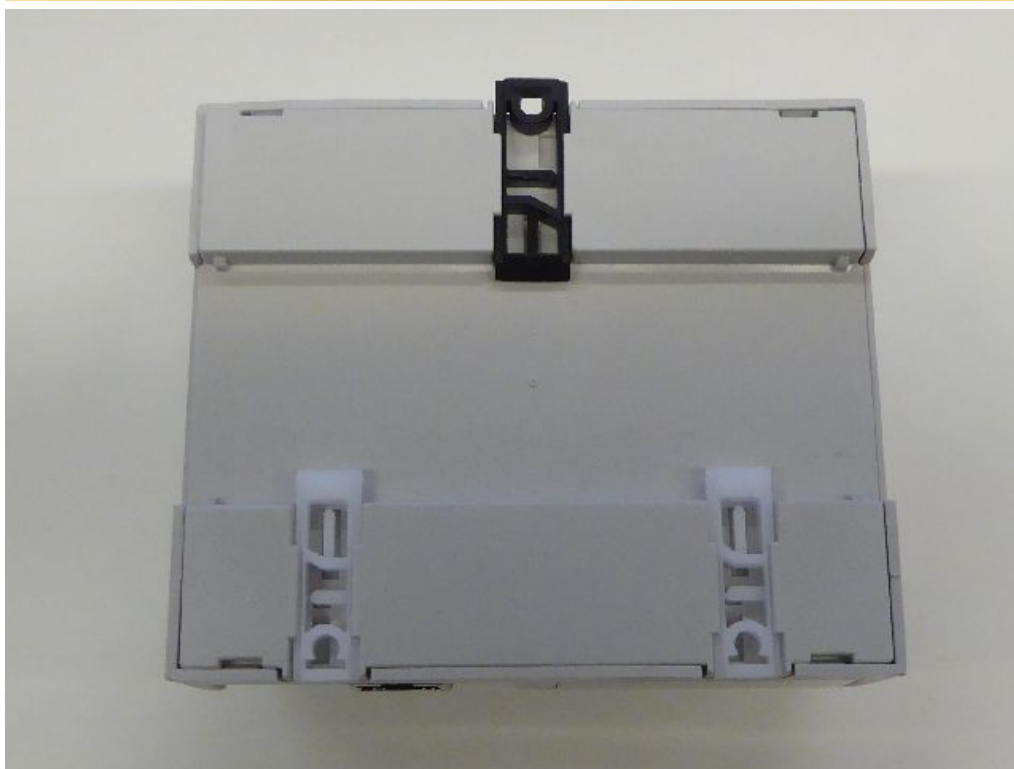






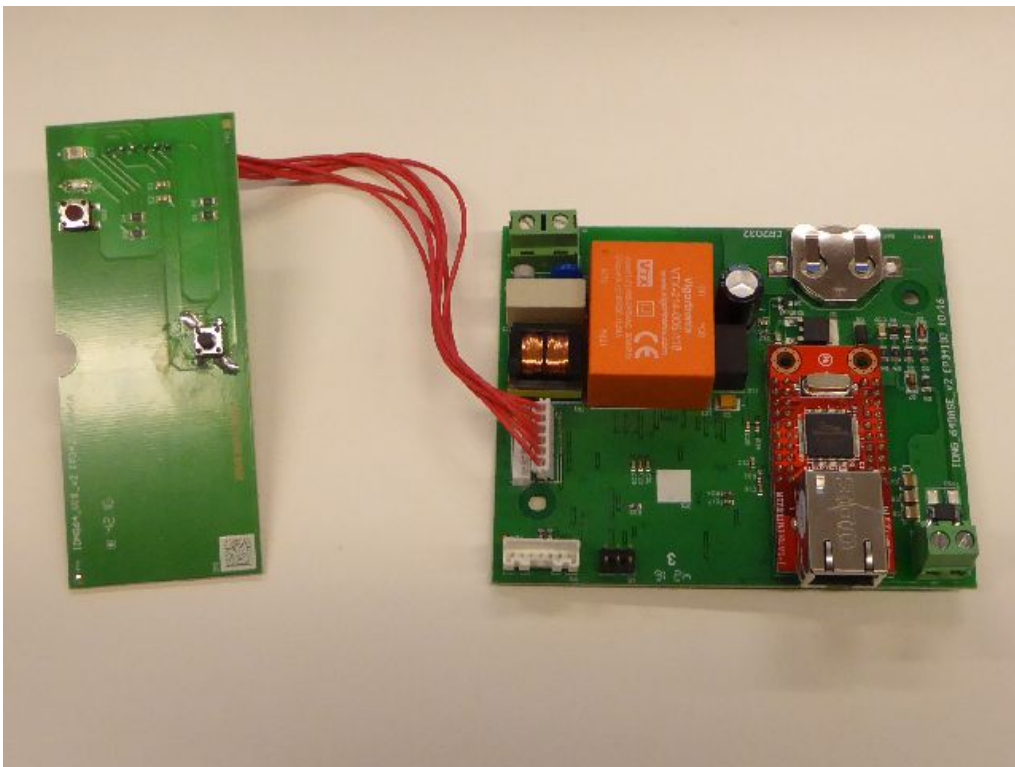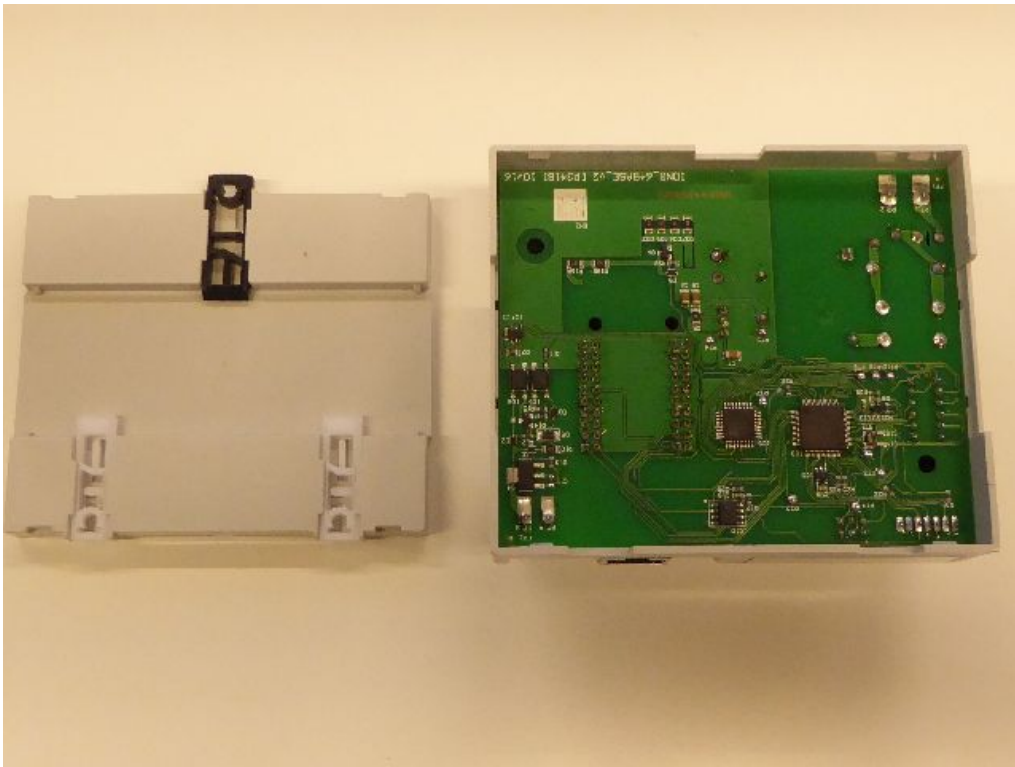

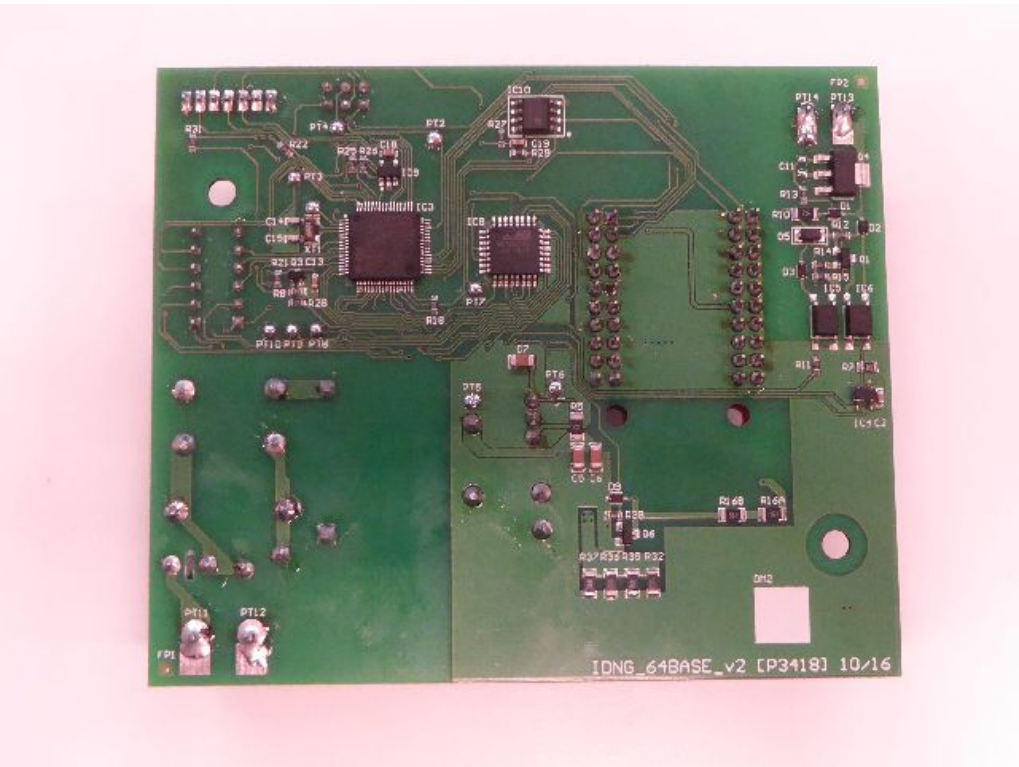

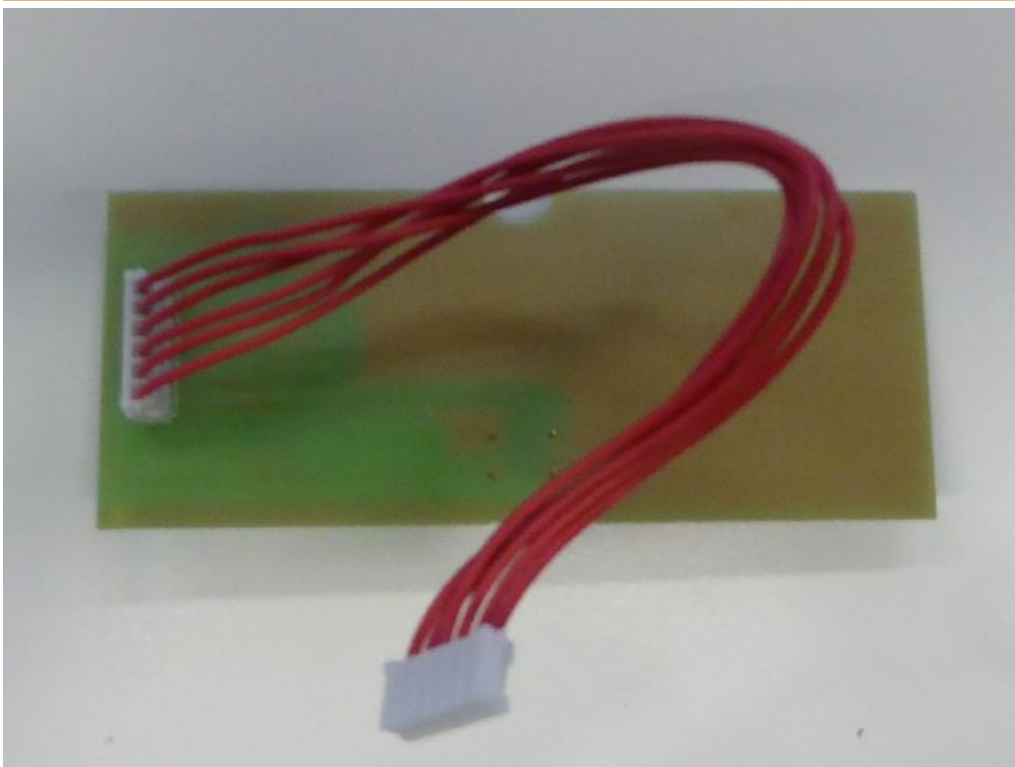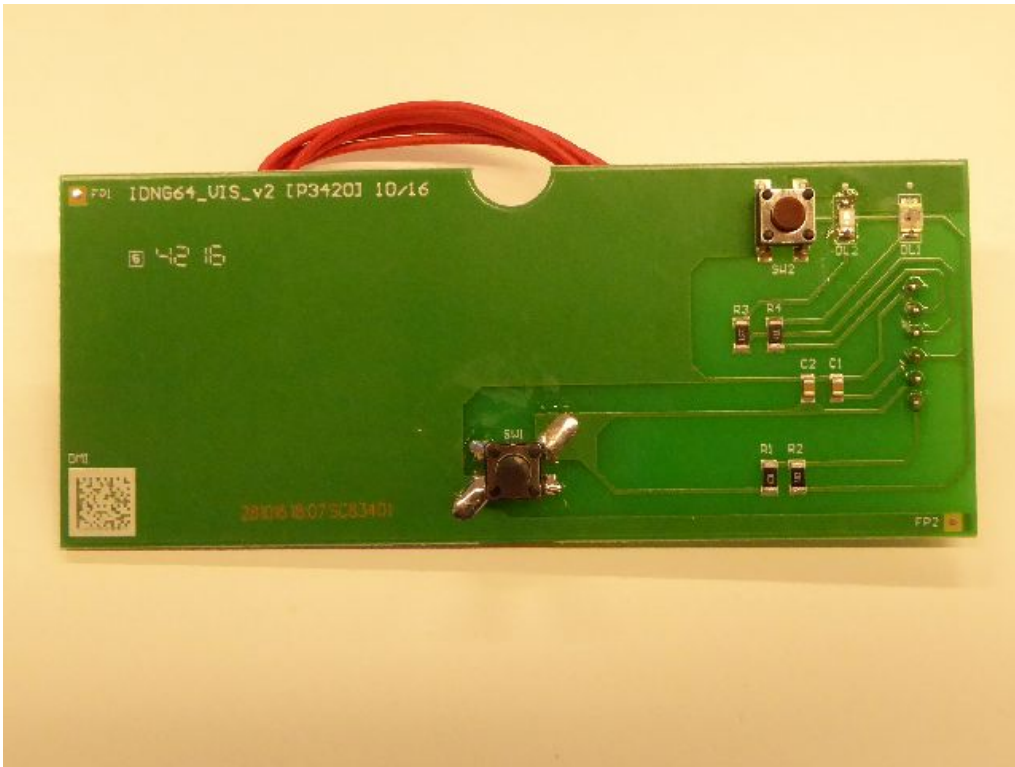



## APPENDIX 2 - User manual:



NORMAGRUP TECHNOLOGY, S.A.  
Parque tecnológico de Asturias, Parcela 10  
33428 Ujanera (Asturias) - SPAIN  
T. +34 985 267 100  
F. +34 985 2669 992  
Inteligentes@normalux.com



### IDNG64 (NORMALINK gateway)



#### General features

The IDNG64 gateway enables to control self-contained emergency lighting units and conventional lights that are compatible with the DALI standard.


Control and monitoring of the devices connected to this gateway can be done from a tablet with the NORMALINK app. This app is compatible with IOS and ANDROID. It is available for download both in the App Store and the Google Play store at no cost.



#### Features


- Dimensions: 105 x 90 x 60 mm.
- Assembly on DIN rail (6 modules).
- Power: 230 Vac - 50/60 Hz.
- Type of battery: CR2032.
- Capacity: up to 64 DALI units (emergency and/or conventional lighting).
- Maximum wire length: 300 metres.
- Source for DALI bus included.
- DALI Wire: 2x 1.5 mm<sup>2</sup>.
- I<sub>max</sub>: 250 mA.
- Test button to put all of the fittings connected to the DALI line in "identification" mode.
- Ethernet port.
- Web server for its configuration.
- "Reset" button to restore the factory parameters.
- "Link" indicator to inform on the status of the DALI bus communications.
- "Fail" LED to indicate a failure in the DALI line.

### Installation

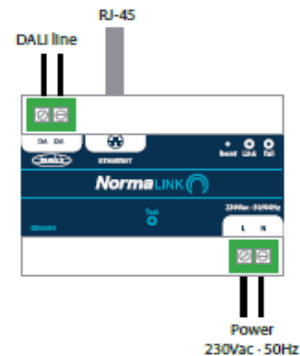

#### DALI line:

- Maximum capacity: 64 fittings.
- Isolated BUS without polarity.
- Do not make loop connections.
- Star connections are allowed.
- Maximum distance: 300 meters.
- Wire: 2 x 1,5mm<sup>2</sup>.

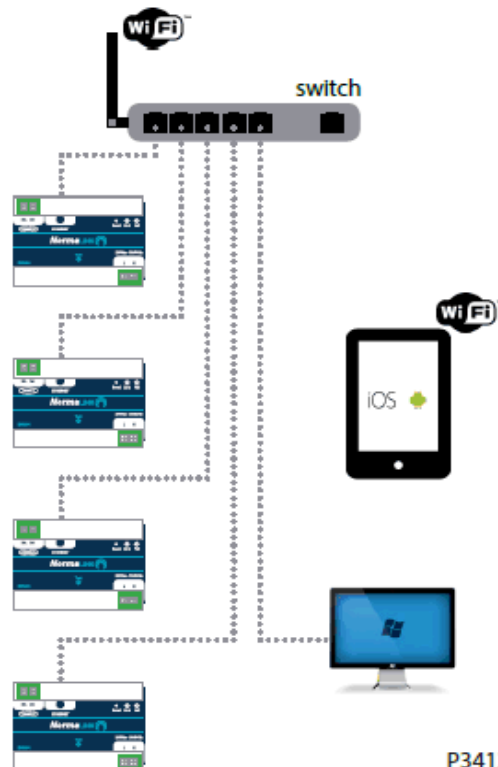

P3412 DIC16



NORMAGRUP TECHNOLOGY, S.A.  
Parque tecnológico de Asturias, Parcela 10  
33428 Llanera (Asturias) - SPAIN  
T. +34 985 267 100  
F. +34 985 2669 992  
inteligentes@normalux.com



### "Test" Button

By pressing this button, all the fittings connected to the DALI Bus will enter into "Identification" mode. When in this mode, the light source of all the luminaries and emergency lights will start blinking. By pressing the "Test" button again, the fittings will exit the "Identification" mode and will stop blinking. As a precautionary measure, all the fittings will exit the "Identification" mode after 15 minutes since they were activated.

### Gateway configuration


IDNG64 gateway can be configured from a web server in any computer connected with a crossover cable. Once the cable is connected, the computer should be in the same network range to be able to access the web server, from where the configuration can be applied.

The Gateway comes by defect with the following network parameters:

IP Address: 192.168.1.254  
Subnet mask: 255.255.255.0

The Gateway does not have a default gateway value. If you are going to program one, make sure that it is done correctly so the fitting will not restart itself every five minutes.

**Connect the gateway to your computer using a crossover cable, configure your computer in the same network range used by the gateway, get into your web browser and type in the IP address of the gateway (by default 192.168.1.254).**

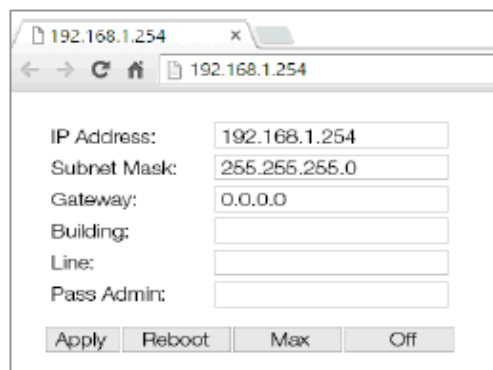

The screenshot shows a web browser window with the address bar set to 192.168.1.254. The page contains a configuration form with the following fields and values:

IP Address:	192.168.1.254
Subnet Mask:	255.255.255.0
Gateway:	0.0.0.0
Building:	
Line:	
Pass Admin:	

At the bottom of the form, there are four buttons: "Apply", "Reboot", "Max", and "Off".

From the web server you will be able to:

- Modify the network parameters of the Gateway (IP Address, Subnet mask and Default gateway).
- Type in the name of the building where the Gateway is installed. In the NORMALINK app all the gateways will be displayed in groups by building.
- Add the name of the Gateway or line for an easier location and identification (number of floor, zone, department.....)
- Send a command to set the lighting level of all the fittings connected to DALI terminals ("Max" button).
- Turn off all the devices connected to the DALI terminals.

**Note:** For all the changes to be applied, type in the password (by defect A1234), press the "Apply" button and then restart the fitting by pressing the "Reboot" button.

**Important:** Keep a log of all the changes applied, for future connections.

### Download the NORMALINK control app.

NORMALINK control app is available both for IOS and ANDROID in their respective stores:

IOS Version



Android Version



P3412 DIC16